
Intelligent LD condensate drains





Intelligent LD condensate drains

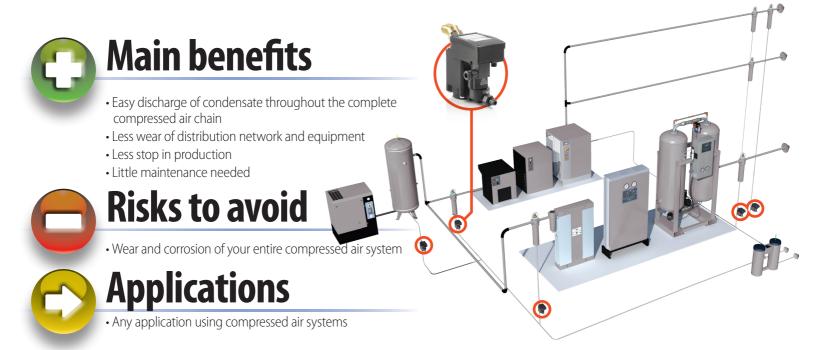


The new LD range functions using a system called capacitive condensate discharge. Compared to the traditional timer condensate discharge system, it has several advantages.

Capacitive condensate discharge	Timer condensate discharge				
Only water is discharged, no compressed air					
• Energy saving	Drain discharges water and compressed air				
No noise and environmental friendly	Increased cost to produce compressed air				
	Increased noise level				

The draining process

The condensate enters through the connection 1 The tank 2 collects the liquid and the diaphragm 3 keeps the drain hole closed. When the liquid level increase, the floater 4 goes up and after reaching the highest level, the solenoid valve 5 controlled by the logic circuit opens the pilot valve 6. The liquid is discharged and when it reaches the minimum level, the diaphragm closes the draining hole again without letting any compressed air out. We point out that a filter **7** and a flow regulator 8 in the hose holder 9 have been added.

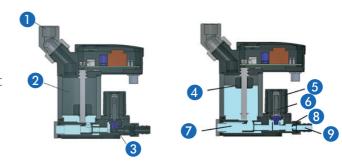

led		al ta							
Max. working pressure	Max. compressor perform.	Max. dryer perform.	Max. filter perform.	Voltage	Connection	A	В	C	Weigh
bar (psi)	mc/h	mc/h	mc/h	Volt / Hz. / Ph.	gas	mm.	mm.	mm.	Kg.

Jan Jan	working	compressor	dryer	filter	Voltage	Connection	Α	В	C	Weight
	pressure	perform.	perform.	perform.						
10.00	bar (psi)	mc/h	mc/h	mc/h	Volt / Hz. / Ph.	gas	mm.	mm.	mm.	Kg.
LD 200	16 (232)	900	1800	9000			132	132	164	0,7
LD 202	16 (232)	1800	3600	18000	230/50-60/1	1 x 1/2"M BSP	132	192,4	224	1,2
LD 203	16 (232)	9500	19000	95000			132	208	239,6	2,8

